


```
#Myconsultant.ir
#Reference : https://colab.research.google.com/
#Matplotlib is the most common charting package,
### Line Plots
```

```
import matplotlib.pyplot as plt

x = [1, 2, 3, 4, 5, 6, 7, 8, 9]
y1 = [1, 3, 5, 3, 1, 3, 5, 3, 1]
y2 = [2, 4, 6, 4, 2, 4, 6, 4, 2]
plt.plot(x, y1, label="line L")
plt.plot(x, y2, label="line H")
plt.plot()

plt.xlabel("x axis")
plt.ylabel("y axis")
plt.title("Line Graph Example")
plt.legend()
plt.show()
```

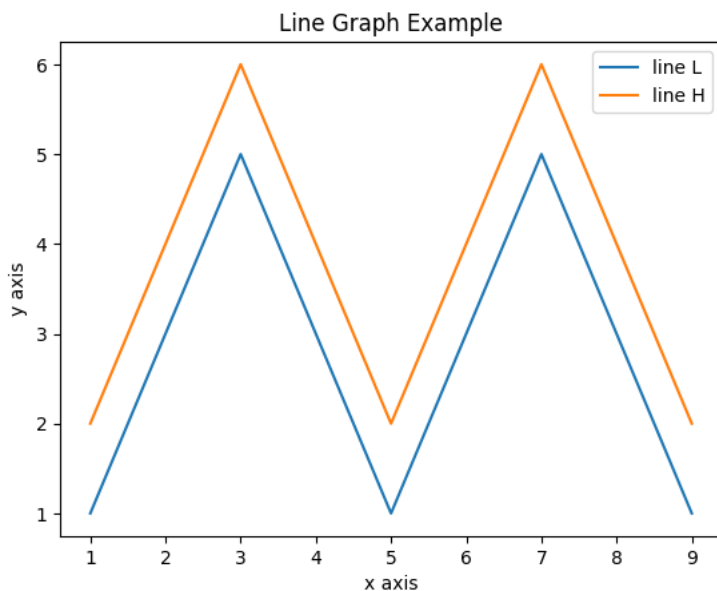

```
### Bar Plots
```

```
import matplotlib.pyplot as plt


# Look at index 4 and 6, which demonstrate overlapping cases.
x1 = [1, 3, 4, 5, 6, 7, 9]
y1 = [4, 7, 2, 4, 7, 8, 3]

x2 = [2, 4, 6, 8, 10]
y2 = [5, 6, 2, 6, 2]

# Colors: https://matplotlib.org/api/colors\_api.html

plt.bar(x1, y1, label="Blue Bar", color='b')
plt.bar(x2, y2, label="Green Bar", color='g')
plt.plot()

plt.xlabel("bar number")
plt.ylabel("bar height")
plt.title("Bar Chart Example")
plt.legend()
plt.show()
```

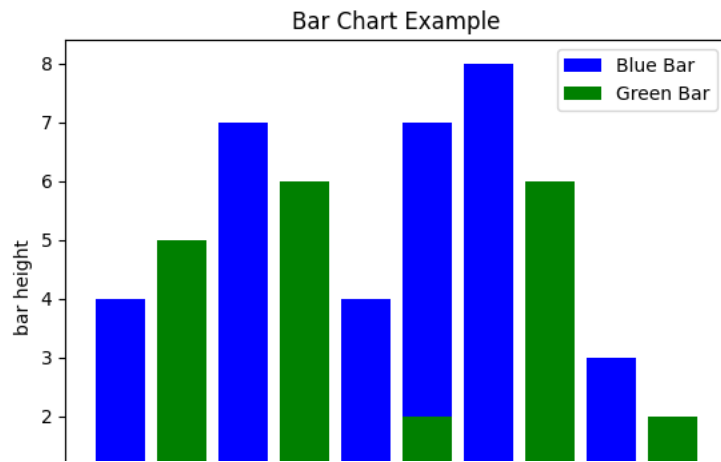

```
### ### Histograms
```



```
import matplotlib.pyplot as plt
import numpy as np
```

```
# Use numpy to generate a bunch of random data in a bell curve around 5.
n = 5 + np.random.randn(1000)
```

```
m = [m for m in range(len(n))]
plt.bar(m, n)
plt.title("Raw Data")
plt.show()
```

```
plt.hist(n, bins=20)
plt.title("Histogram")
plt.show()
```

```
plt.hist(n, cumulative=True, bins=20)
plt.title("Cumulative Histogram")
plt.show()
```

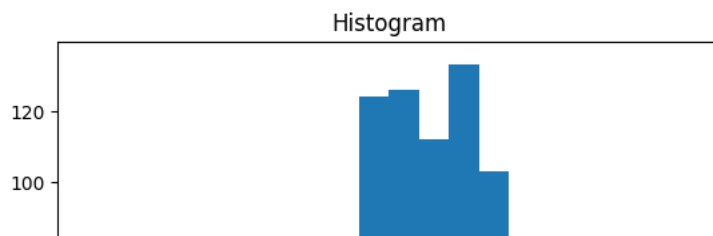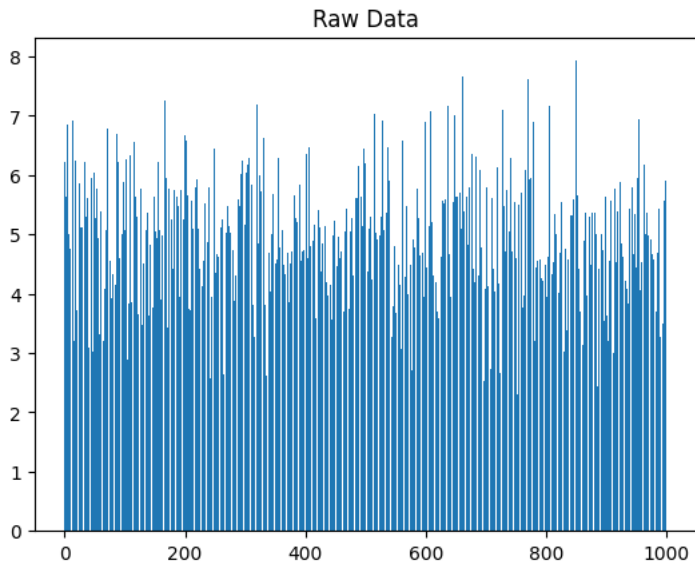


```
### Scatter Plots
import matplotlib.pyplot as plt
```

```
x1 = [2, 3, 4]
y1 = [5, 5, 5]
```

```
x2 = [1, 2, 3, 4, 5]
y2 = [2, 3, 2, 3, 4]
y3 = [6, 8, 7, 8, 7]
```

```
# Markers: https://matplotlib.org/api/markers\_api.html
```

```
plt.scatter(x1, y1)
plt.scatter(x2, y2, marker='v', color='r')
plt.scatter(x2, y3, marker='^', color='m')
plt.title('Scatter Plot Example')
plt.show()
```

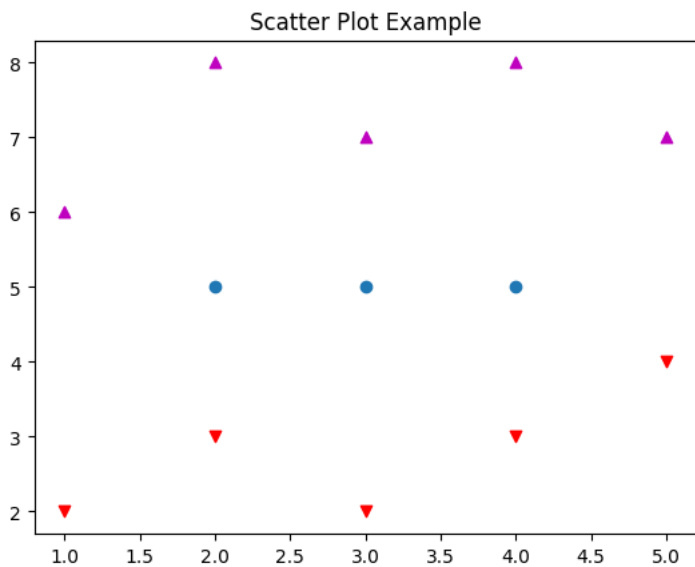

```


#Stack Plots
import matplotlib.pyplot as plt

idxes = [ 1, 2, 3, 4, 5, 6, 7, 8, 9]
arr1 = [23, 40, 28, 43, 8, 44, 43, 18, 17]
arr2 = [17, 30, 22, 14, 17, 17, 29, 22, 30]
arr3 = [15, 31, 18, 22, 18, 19, 13, 32, 39]

# Adding legend for stack plots is tricky.
plt.plot([], [], color='r', label = 'D 1')
plt.plot([], [], color='g', label = 'D 2')
plt.plot([], [], color='b', label = 'D 3')

plt.stackplot(idxes, arr1, arr2, arr3, colors= ['r', 'g', 'b'])
plt.title('Stack Plot Example')
plt.legend()
plt.show()

```

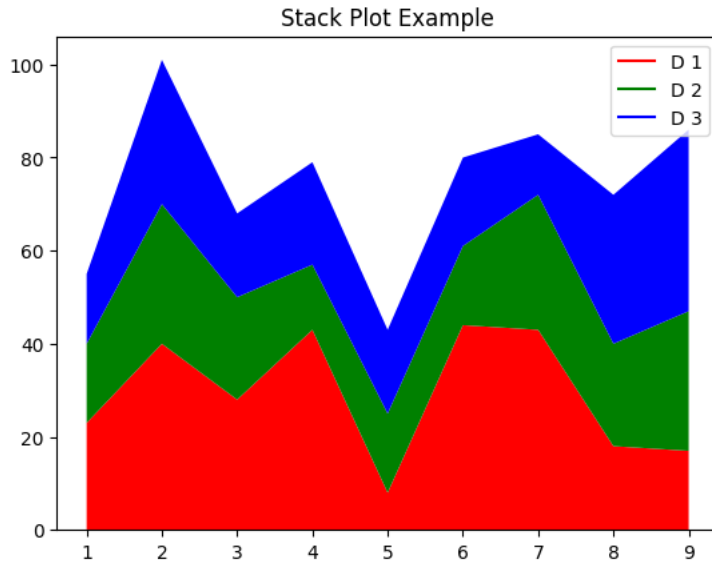

```

### Pie Charts

import matplotlib.pyplot as plt

labels = 'Section 1', 'Section 2', 'Section 3'
sections = [56, 66, 24]
colors = ['c', 'g', 'y']

plt.pie(sections, labels=labels, colors=colors,
        startangle=90,
        explode = (0, 0.1, 0),
        autopct = '%1.2f%%')

plt.axis('equal') # Try commenting this out.
plt.title('Pie Chart Example')
plt.show()

```

Pie Chart Example



```


### fill_between and alpha
import matplotlib.pyplot as plt
import numpy as np

ys = 200 + np.random.randn(100)
x = [x for x in range(len(ys))]

plt.plot(x, ys, '-')
plt.fill_between(x, ys, 195, where=(ys > 195), facecolor='g', alpha=0.6)

plt.title("Fills and Alpha Example")
plt.show()

```

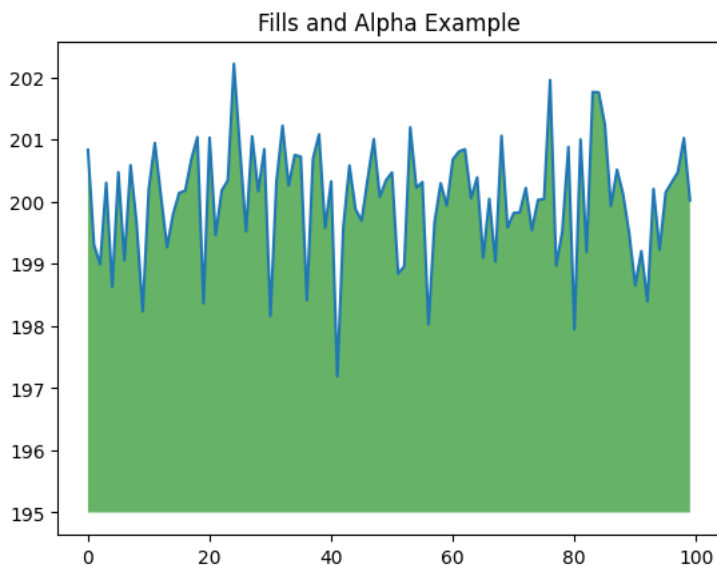

```

### Subplotting using Subplot2grid

```

```

import matplotlib.pyplot as plt
import numpy as np

def random_plots():
    xs = []
    ys = []

    for i in range(20):
        x = i
        y = np.random.randint(10)

        xs.append(x)
        ys.append(y)

    return xs, ys

fig = plt.figure()
ax1 = plt.subplot2grid((5, 2), (0, 0), rowspan=1, colspan=2)
ax2 = plt.subplot2grid((5, 2), (1, 0), rowspan=3, colspan=2)
ax3 = plt.subplot2grid((5, 2), (4, 0), rowspan=1, colspan=1)
ax4 = plt.subplot2grid((5, 2), (4, 1), rowspan=1, colspan=1)

x, y = random_plots()
ax1.plot(x, y)


x, y = random_plots()
ax2.plot(x, y)

x, y = random_plots()
ax3.plot(x, y)

```

```
x, y = random_plots()
ax4.plot(x, y)

plt.tight_layout()
plt.show()
```

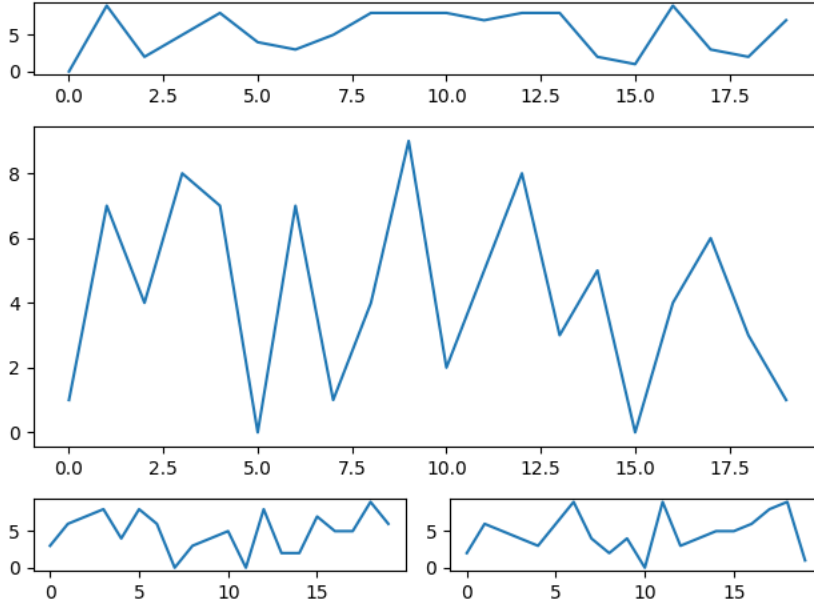

#3D Scatter Plots

```
import matplotlib.pyplot as plt
import numpy as np
from mpl_toolkits.mplot3d import axes3d

fig = plt.figure()
ax = fig.add_subplot(111, projection = '3d')


x1 = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
y1 = np.random.randint(10, size=10)
z1 = np.random.randint(10, size=10)

x2 = [-1, -2, -3, -4, -5, -6, -7, -8, -9, -10]
y2 = np.random.randint(-10, 0, size=10)
z2 = np.random.randint(10, size=10)

ax.scatter(x1, y1, z1, c='b', marker='o', label='blue')
ax.scatter(x2, y2, z2, c='g', marker='D', label='green')

ax.set_xlabel('x axis')
ax.set_ylabel('y axis')
ax.set_zlabel('z axis')
plt.title("3D Scatter Plot Example")
plt.legend()
plt.tight_layout()
plt.show()
```

3D Scatter Plot Example

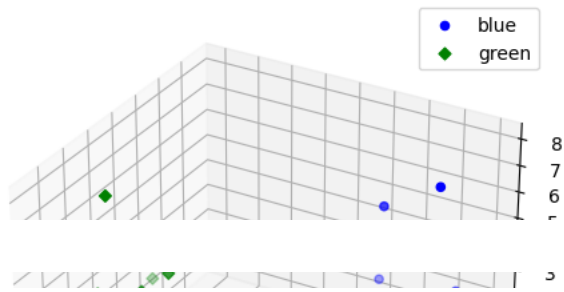

```
#3D Bar Plots
```

```
import matplotlib.pyplot as plt
import numpy as np

fig = plt.figure()
ax = fig.add_subplot(111, projection = '3d')


x = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
y = np.random.randint(10, size=10)
z = np.zeros(10)

dx = np.ones(10)
dy = np.ones(10)
dz = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

ax.bar3d(x, y, z, dx, dy, dz, color='g')

ax.set_xlabel('x axis')
ax.set_ylabel('y axis')
ax.set_zlabel('z axis')
plt.title("3D Bar Chart Example")
plt.tight_layout()
plt.show()
```

3D Bar Chart Example

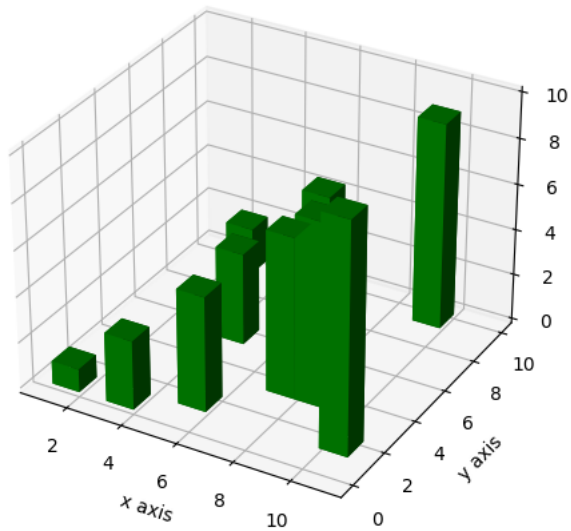

```
#Wireframe Plots
import matplotlib.pyplot as plt

fig = plt.figure()
ax = fig.add_subplot(111, projection = '3d')


x, y, z = axes3d.get_test_data()

ax.plot_wireframe(x, y, z, rstride = 2, cstride = 2)

plt.title("Wireframe Plot Example")
```

```
plt.tight_layout()
plt.show()
```

Wireframe Plot Example

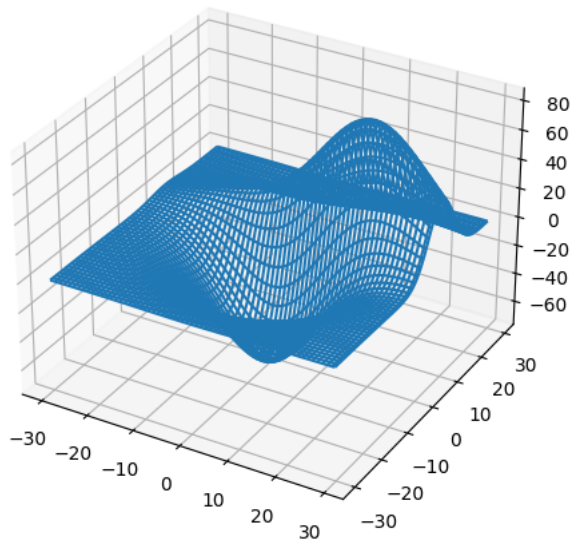

```
#Seaborn
import matplotlib.pyplot as plt
import numpy as np
import seaborn as sns

# Generate some random data
num_points = 20
# x will be 5, 6, 7... but also twiddled randomly
x = 5 + np.arange(num_points) + np.random.randn(num_points)
# y will be 10, 11, 12... but twiddled even more randomly
y = 10 + np.arange(num_points) + 5 * np.random.randn(num_points)
sns.regplot(x, y)
plt.show()
```

```
-----
TypeError                                Traceback (most recent call last)
<ipython-input-22-2cc365ce32be> in <cell line: 12>()
     10 # y will be 10, 11, 12... but twiddled even more randomly
     11 y = 10 + np.arange(num_points) + 5 * np.random.randn(num_points)
--> 12 sns.regplot(x, y)
     13 plt.show()
```

TypeError: regplot() takes from 0 to 1 positional arguments but 2 were given

SEARCH STACK OVERFLOW


```
import matplotlib.pyplot as plt
import numpy as np

# Make a 10 x 10 heatmap of some random data
side_length = 10
# Start with a 10 x 10 matrix with values randomized around 5
data = 5 + np.random.randn(side_length, side_length)
# The next two lines make the values larger as we get closer to (9, 9)
data += np.arange(side_length)
data += np.reshape(np.arange(side_length), (side_length, 1))
# Generate the heatmap
sns.heatmap(data)
plt.show()
```





```
import altair as alt
from vega_datasets import data
cars = data.cars()
```

```
alt.Chart(cars).mark_point().encode(
    x='Horsepower',
    y='Miles_per_Gallon',
    color='Origin',
).interactive()
```

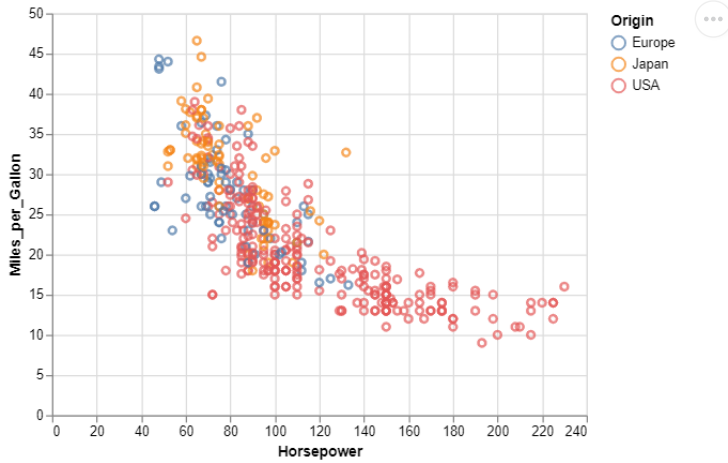

```
from plotly.offline import iplot
import plotly.graph_objs as go
```

```
data = [
    go.Contour(
        z=[[10, 10.625, 12.5, 15.625, 20],
          [5.625, 6.25, 8.125, 11.25, 15.625],
          [2.5, 3.125, 5., 8.125, 12.5],
          [0.625, 1.25, 3.125, 6.25, 10.625],
          [0, 0.625, 2.5, 5.625, 10]]
    )
]
iplot(data)
```

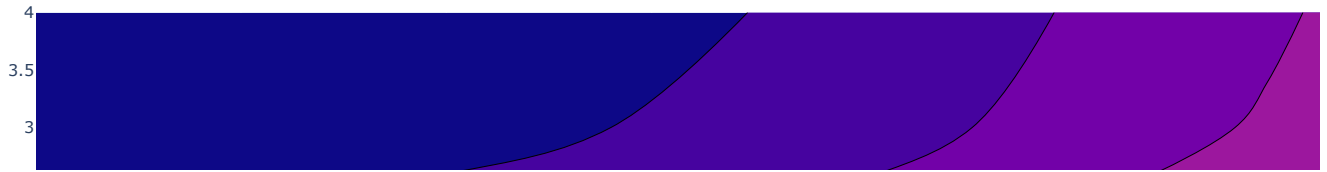

```

## Bokeh
import numpy as np
from bokeh.plotting import figure, show
from bokeh.io import output_notebook

# Call once to configure Bokeh to display plots inline in the notebook.
output_notebook()
N = 4000
x = np.random.random(size=N) * 100
y = np.random.random(size=N) * 100
radii = np.random.random(size=N) * 1.5
colors = ["#%02x%02x%02x" % (r, g, 150) for r, g in zip(np.floor(50+2*x).astype(int), np.floor(30+2*y).astype(int))]

p = figure()
p.circle(x, y, radius=radii, fill_color=colors, fill_alpha=0.6, line_color=None)
show(p)

```

